

DESCRIPTION

Self-priming centrifugal jetting pump model JAMCO 80/60 built for pumping water with solids containing sand and mud. Designed primarily for jetting wellpoints.


The special construction makes the pump suitable for different environments like construction sites, industrial areas etc.

FEATURES

- **Fast priming**
- **High mechanical strength**
- **Designed for jetting wellpoints**
- **Compact and robust**



COUPLING:	Directly to flywheel housing
DIAMETER OF INLET AND OUTLET:	Inlet diameter: 80mm - 3" Outlet diameter: 60mm - 2"
SPHERICAL SOLID HANDLING:	35mm
CONSTRUCTION:	Base mounted or skid mounted with wheels
VERSION:	Diesel engine or Gasoline engine
INSTALLED POWER @ R.P.M.	17 kW @ 2500 R.P.M.
STANDARD VERSION	Cast Iron GG 25
REQUEST VERSION	Stainless Steel
DIMENSIONS:	Base: 1050mm (L) x 750mm (P) x 900mm (H) Skid: 1050mm (L) x 1200mm (P) x 1350mm (H)
WEIGHT	Base: 430 kg Skid: 490 kg

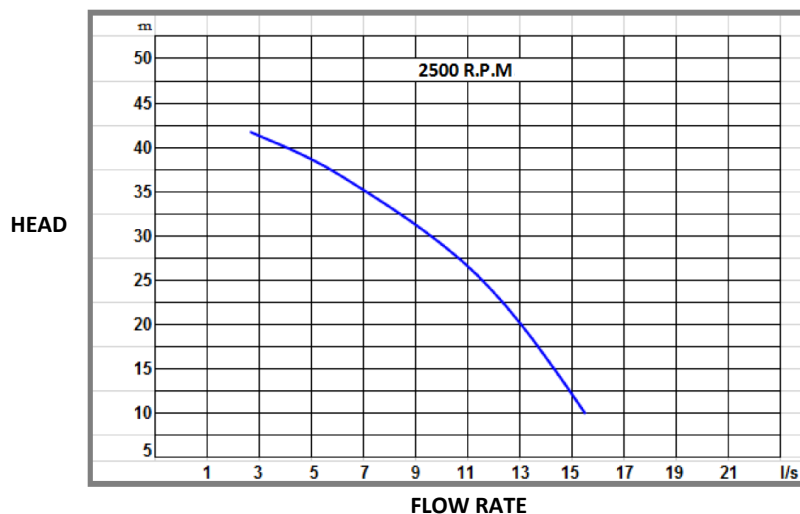

We reserve the right to modify, discontinue or make adaptations to this product at our discretion.

